


الدخول لمتصفح google chrome وتسجيل ip الدخول لمتصفح google chrome الراوتر بالبحث 192.168.1.1

Log in

Archer VR400

AC1200 Wireless Gigabit VDSL/ADSL Modem Router

Į.

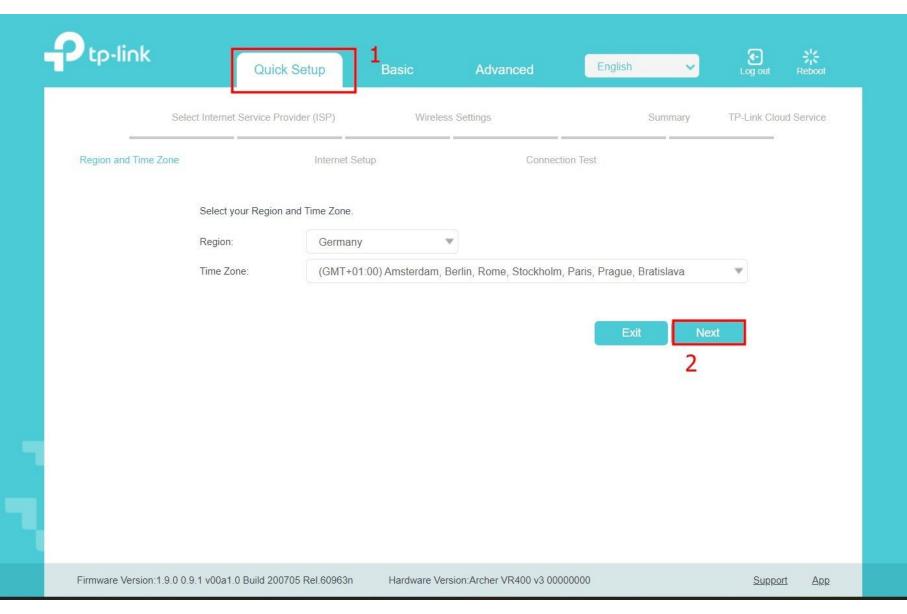



Basic







Se	lect Internet Service Provid	er (ISP)	Wireless Settings		Summary	TP-Link Cloud Service
Region and Time Zone		Internet Setup		Connection Test		
	Select your ISP from th	e ISP List or select Other if	f you can't find your ISP.		3	
	IOI LISE	Other			Back N	ext
					4	



Basic







Sele	ect Internet Service Provider (ISP)	Wireless Set	ttings	Summary	TP-Link Cloud Service
Region and Time Zone	Internet	t Setup	Con	nnection Test	
	Enter the Internet connection information needed or contact your service provider for assistance.				
	VLAN Tag:	☐ Enable			
	Internet Connection Type:	PPPoE	•		
5	Username:	@waves.sy		@waves.sy	
6	Password:	*********	Ø	***	
O	Confirm Password:	*******	Ø	****wg	
				Back No.	ext



Basic







Region and Time Zone	Intern	net Setup	Connection Test				
	Smart Connect						
	Smart Connect	✓ Enable					
	Smart Connect allows your mobile device to automatically switch to the Wi-Fi band that provides the fastest speed. When enabled, the 2.4GHz and 5GHz networks share the same network name and password(only one SSID will be displayed), and your wireless device will automatically switch connection to the WI-FI band that provides the fastest speed.						
	You can change the wireless network name and password.						
	Wireless Network	Enable Wireless Radio					
	Wireless Network			ername			
	Network Name (SSID):		8 us	sername			



Basic







Sele	ect Internet Service Provider (ISP)	Wireless Settings		Summary	TP-Link Cloud Service	
Region and Time Zone	Internet Se	etup	Connection Test			
	Wireless settings have been changed successfully. Please use the following wireless network names and passwords for your wireless connection.					
	Wireless Network	Enabled				
	Network Name (SSID):					
	Password:					
	Please choose your current connecti	on to continue:				
11	I have successfully reconnected to	to the router using the new wirele	ess settings.	g a wired connection	ī.	
				Back Ne	xt 12	